


CHALLENGER

YOUR PARTNER IN A MORE SECURE FUTURE

Security Lighting

Introducing the new Security Camera and LED Floodlight with WIFI

Order code: SLFLEDWIFI

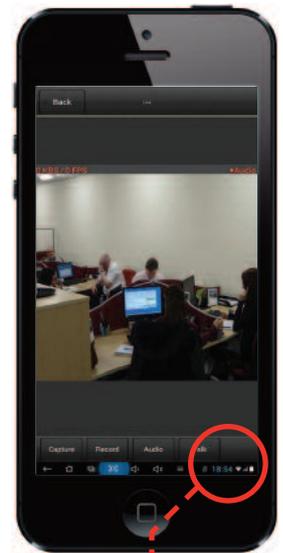

- Energy efficient LED
- 2 x 10W LED lamps boasting impressive 1100lm output
- Up to 40,00 hours lifespan, and true 180° flood coverage

- High resolution camera with built in DVR

- Easy to install
- Quick fix base
- Wall or under eaves mounting

- View via WIFI
- P2P technology for easy setup
- Use mobile, tablet or PC to view and capture video or photos

DETECTS INTRUDERS

FLOODLIGHTS THE AREA

RECORDS VIDEO OR PHOTOS

CONNECTS TO WIFI


SIMPLE & FLEXIBLE TO INSTALL



TRUE LED FLOOD LIGHTING

As LED is a directional light source, often coverage is more of a 'spot' rather than a traditional flood.

Our curved design and twin bank of LEDs allow an extra wide coverage with true flood lighting.

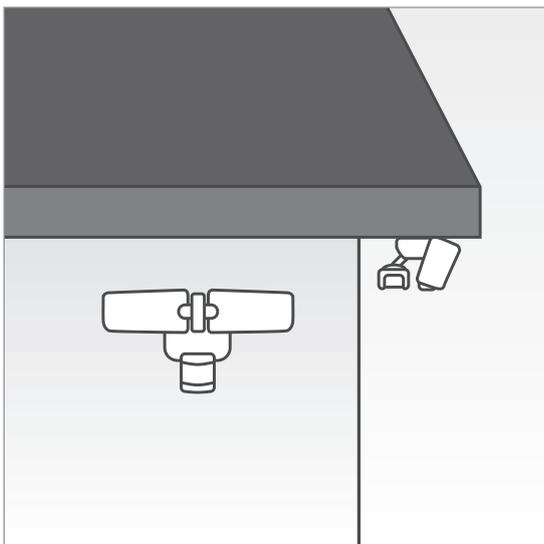

FLEXIBLE MOUNTING

Fully adjustable LED banks and PIR sensor allow mounting both on a wall or under eaves.



EASY TO FIT

Quick fix base allows straight forward mounting. Firstly attach the base and then simply attach the fixture with one bolt.

Security Lighting



PIR MOTION SENSOR


To further reduce energy, the built in PIR motion sensor detects movement from intruders and activates the lamps.

An adjustable sensor allows light activation only when required and a flashing LED provides indication motion has been detected.



HIGH RESOLUTION CAMERA

The camera provides clear video or still images day and night. Recordings are kept on a supplied Micro SD card (1GB) and/or can be transmitted to a remote device.

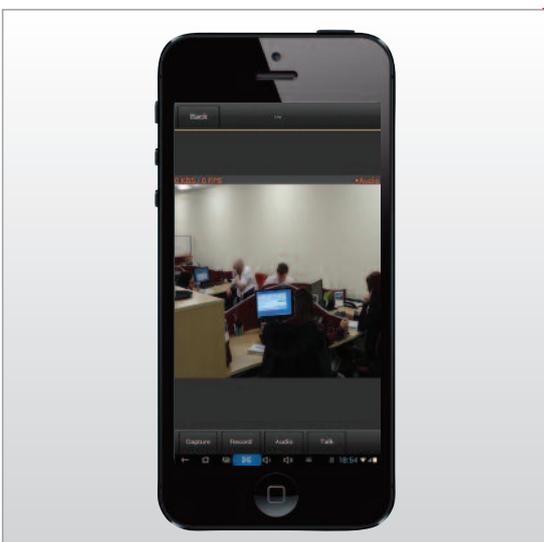

WIFI CONNECTIVITY

Use your smartphone, tablet or PC to view the camera from anywhere in the world plus remotely record video or capture still images with the F.O.C Challenger app.

The motion detection alarms can also be programmed to alert you on your remote device and/or email upon activation. P2P connectivity ensures hassle free setup.

Security Lighting

Specification

Supply voltage	100 - 240V AC
LED output	1100lm
PIR detection angle	180°
PIR detection range	12m
Adjustable time delay	1, 5, 20 minutes
Adjustment to LED heads	Up 20°, down 45°
Adjustable PIR sensitivity	Low, medium, high
PIR detection indication	Flashing red LED
Adjustable PIR	Horizontal 30°, vertical 90°
LED colour temperature	5,000k ± 500k
Camera resolution	1/4" 3MP
Micro SD card supplied	1GB (32GB maximum)
Image format	JPEG/AVI
Transmission	WIFI
Mounting	Wall or eaves with quick fix base
IP rating	IP44

