




COLLINGWOOD
LIGHTING




FEATURES & BENEFITS

- › Uses latest single source technology to replicate traditional halogen look
- › Mains dimmable as standard
- › Compact integral driver for easy installation
- › 4 year extended warranty available
- › LED downlight complete with bezel for a straightforward fit

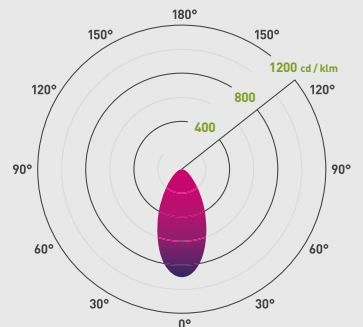

4000K 55°
Additional diagrams available at collingwoodlighting.com

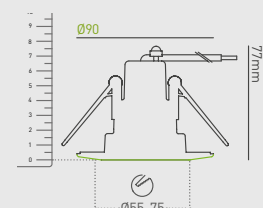

H2 Lite

Flicker-free, dimmable, fire-rated, LED downlight complete with bezel

- IP65*** Suitable for use in bathrooms
- FLICKER FREE** Flicker-free
- 4** 4 year extended warranty available

- 55°
 - 5.8W
 - 855-75
 - 47°C
 - 40°C
 - DIM
 - SELV
 - 210g
 - 1
 - 40,000h
 - 35DCM
- * IP65 (front) / IP20 (back) | * Ceiling only

PHOTOMETRICS @ 25°C

Colour	Beam angle	Finish	Product code	CRI	lm	lm/W	lx at 1m
4000K	55°	B / Steel	DL388BS5540	>80Ra	430	74	420
	55°	Matt White	DL388MW5540	>80Ra	430	74	420
3000K	55°	B / Steel	DL388BS5530	>80Ra	405	70	400
	55°	Matt White	DL388MW5530	>80Ra	405	70	400

GENERAL

Building regulations	Part B (fire protection), C (moisture protection), E (acoustic protection), P (electrical safety) and L (conservation of energy - 2014 regulations)
Construction material	Mild Steel
Inrush current	1A 0.5ms
Maximum ceiling thickness	40mm

WIRING

Cable/flying lead	0.2m (Class II)
Type of wiring required	Parallel (mains) 220-240V AC 50/60Hz

LED DRIVERS

Product code	Input voltage	Input current	Power factor	Dimming	Bathroom zone
N/A (driver built in)	220-240V	-	>0.88	Yes (mains)	1 (ceiling only)

ACCESSORIES

Product code	Description
DLCONVERT70	Converter plate
DM298GRID	Mains grid dimmer
14800121 (SPOTCLIP-III)	Insulation cover cap for recessed downlights - call us on 01604 495 151 for more details

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED

A++
A+
A
C
D
E

874/2012