

# SLx 7 Way Surge Protector



76950R

# USER GUIDE

Philex Customer Careline 0901 293 0038\*

## Introduction

*Congratulations on the purchase of your SLx® 7 Way Surge Protector. This is an extension socket that features Digital Aerial Protection, Phone/Fax/Modem Protection and Mains Conditioning which will ensure you high levels of protection from power surges, spikes and lightning strikes as well as filtering out background noise from your ring main.*

*It is ideal for use with Digital TV, HDTV, Satellite Systems & PC Media Centres*


*Digital Aerial Protection is facilitated via the TV/FM/DAB Satellite Surge Protection Sockets located on left hand edge of product (additional cables not included)*

*Phone, Fax & Modem Protection is facilitated via the Fax/Phone/Modem Surge Protection sockets located on left hand edge of product (additional cables not included)*


*Digital Aerial Protection for your TV Card or Adaptor is facilitated via the TV/FM/DAB Satellite Surge Protection Sockets located on left hand edge of product (additional cables not included)*

*Phone, Fax & Modem Protection is facilitated via the Fax/Phone/Modem Surge Protection sockets located on left hand edge of product (additional cables not included) if protecting an ADSL Modem you will still require an ADSL Microfilter at the wall connection.*

### Ideal for use with AV equipment

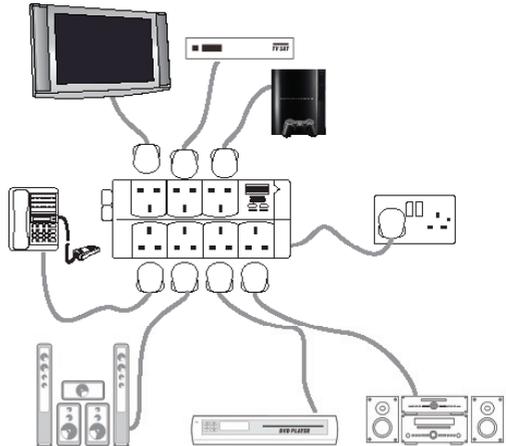

### Ideal for use with PC equipment

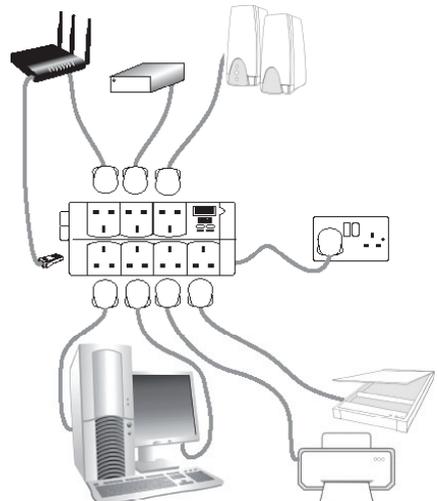

\*Careline calls are charged at £1 per minute from a BT landline. Call charges from other networks may vary.

## Operation

This unit can be turned on and off via a rocker switch position in the top right hand corner of the product.

Plug up to 7 appliances into your extension unit, making sure load does not exceed 2400W

## Technical Data

Max Rated Load:	2400W
Rated Current:	10A
Rated Voltage:	250VAC 50Hz
Clamping Voltage:	775V
Max Energy:	Full 3 line surge protection: L-N, L-G, N-G: 918 joules
Max Current:	Full type : 36,000A
Max Spike:	Voltage 6kV
Response Time:	Less then 1 Nanosecond
EMI/RFI Noise Filter:	Frequency Range: 150KHz – 100MHz
Attenuation:	Up to 40dB

## General Safety Precautions

Do not exceed the maximum power load of 2400W

The extension unit is for indoor use only

The extension unit should be installed in a ventilated position and not immediately adjacent to heat generating equipment

Keep unit out of direct sunlight, rain and away from moisture

Use indoors and in dry locations only. Not for use with aquariums and other water related products

This Protector must be plugged directly into a mains socket and not be "daisy chained" together in serial fashion with other power strips, UPS, or other surge protectors or extension cords.

Do not exceed the maximum rated load of 2400W



For further information or any queries please contact

**CUSTOMER CARELINE: 0901 293 0038**

Calls are charged at £1 per minute from a BT landline.

Call charges from other networks may vary.

**TECHNICAL SUPPORT: <http://technical.philex.com>**



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority for recycling advice.