


SPECIFICATION SHEET


Product Code CMA019

Description 10AX 2 Gang 4 Way Plate Switch

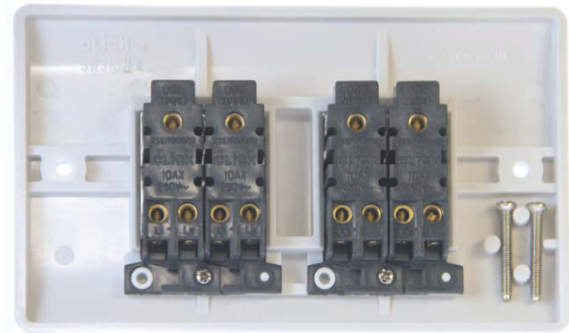

| General Information | |
|----------------------|--|
| Dimensions | 146mm x 86mm x 9.5mm |
| Material composition | Rear Housing: Nylon Front Plate: Urea Terminals: Brass Earth Strap: Mild Steel Terminal Screws: Steel and Yellow Passivated Silver "on-lay" copper/brass contacts |
| Back Box Depth | 16mm – 47mm |
| Cable Size | 4 x 1.5mm ² or 2 x 2.5mm ² |
| Load Rating | 10AX (Suitable for Inductive loads) |
| Modular | Yes |
| Terminal Size | Live: 3.5mm |
| Gang | 4 |
| 2 Way | Yes |
| Intermediate | No |
| Warranty | 20 Years Domestic |

| | |
|------------------|-------------|
| Standards | BS EN 60669 |
|------------------|-------------|

| Additional Information | |
|------------------------|--|
| | <p>Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.</p> <p>All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.9% kill rate across all four types of the strains of bacteria – MRSA, E-Coli, Salmonella, and Klebsiella pneumoniae.</p> <p>Interchangeable with switches in the Mini Grid system.</p>  |