

thermotouch[™]
TOUCHSCREEN SYSTEM CONTROL



Thermotouch 4.3iC™ is a full colour, TrueTouch underfloor heating controller with a fully programmable heating schedule. 2 interchangeable fascia kits available.

- ✓ 4.3 inch TrueTouch display
- ✓ Full colour graphical interface
- ✓ 5 flexible heating modes
- ✓ Interchangeable fascia kits
- ✓ 7 day heating schedule
- ✓ Mounts onto a standard backbox

Simple to operate



4.3 inch intelligent display

Full colour touchscreen

4.3iC TRUETOUCH DISPLAY

Thermotouch™ features a large 4.3 inch full colour touchscreen and can control underfloor heating systems of up to 16 Amps.

The beautiful 4.3 inch TrueTouch LED backlit display makes controlling and programming your electric underfloor heating system intuitive and easy.

ENHANCE EVERY PROJECT

Enhance your project with Thermonet® electric underfloor heating. The Thermonet® feeling brings you the ultimate in comfort, luxury and after sales backup.

INCLUDED IN THE RANGE

5240 Thermotouch 4.3iC™
5241 Aluminium Fascia Kit
5242 Acrylic Fascia Kit

WHAT'S IN THE BOX?

5240 Thermotouch 4.3iC™
Fixing Screws
Sensor Probe
Installation Guide

**THREE YEAR
WARRANTY**

3

THERMOTOUCH 4.3iC™ LOCATION

Thermotouch 4.3iC™ should ideally be located within the room to be heated, subject to current electrical regulations relating to bathrooms and wet areas.

As Thermotouch 4.3iC™ is floor sensing it can be installed outside the room or in a cupboard if necessary.

For easy operation and access to controls choose a location about 1.3m above the floor.

Should a remote location for the thermostat be necessary, the system wiring can be extended up to 50m from the installation using 0.75mm twin core flex.

MAXIMUM LOAD

Thermotouch 4.3iC™ can control underfloor heating systems of up to 16A or 3600W.

LARGE AREAS OVER 16A

For areas exceeding 16A that require control by a single thermostat, a contactor/snubber must be used.

Contactor/snubbers are available in our electrical accessories range.

Call 0800 019 5899 for more information or visit www.thermogroupuk.com

Technical Data

Sensor Modes	Floor, Ambient, F/A
Voltage	230V 50/60Hz
Max Load	16A 3600W
Setting Range	5 - 35°C
Storage Temp	0 - 50°C
Protection	IP30
Display Size	4.3"
Height	87mm
Width	130mm
Depth	43mm
Sensor Length	3m
Sensor	NTC10k 10kΩ at 25°C
Accuracy	± 0.5°C

Warranty Details

All of our thermostats are covered by a 3 year limited manufacturer guarantee.



CONTACT US ONLINE



Browse our full product range, watch videos, download product literature and get a quote, all on the Thermogroup UK website.

www.thermogroupuk.com

CONTACT US BY PHONE



Got a question or query? Call our UK support line free from your land line. Open 07:30 - 16:30 Mon - Fri

0800 019 5899



CONTACT US BY MAIL




Tell your satnav where to find us or just write us a letter to say hello!

Thermogroup UK, Bridge House, Hop Pocket Lane, Paddock Wood, Kent. TN12 6DQ.

Simple installation and wiring process

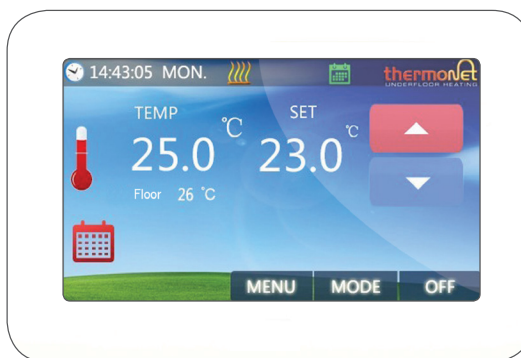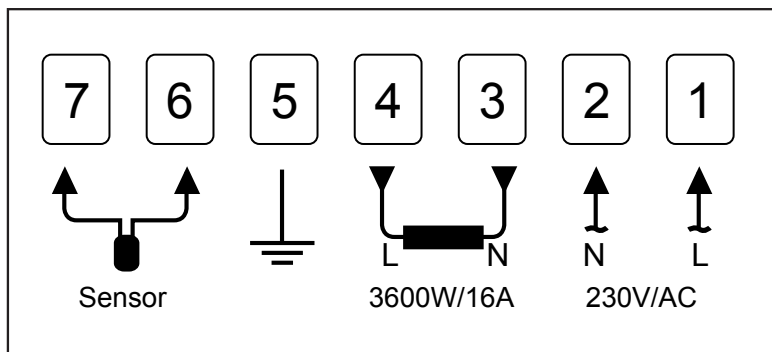

Mode icons



Touchscreen controls for easy operation

Thermotouch 4.3iC™ is a digital thermostat, which is designed for electric floor heating systems with a maximum load of up to 16A (3600W). Thermotouch 4.3iC® features a 4.3" intelligent control TrueTouch colour display and 4 languages.